


1324 Knee

The new standard in safety knees

This NEW knee is not the friction braking knee of old.
This geometrically aligned system never fails in stability

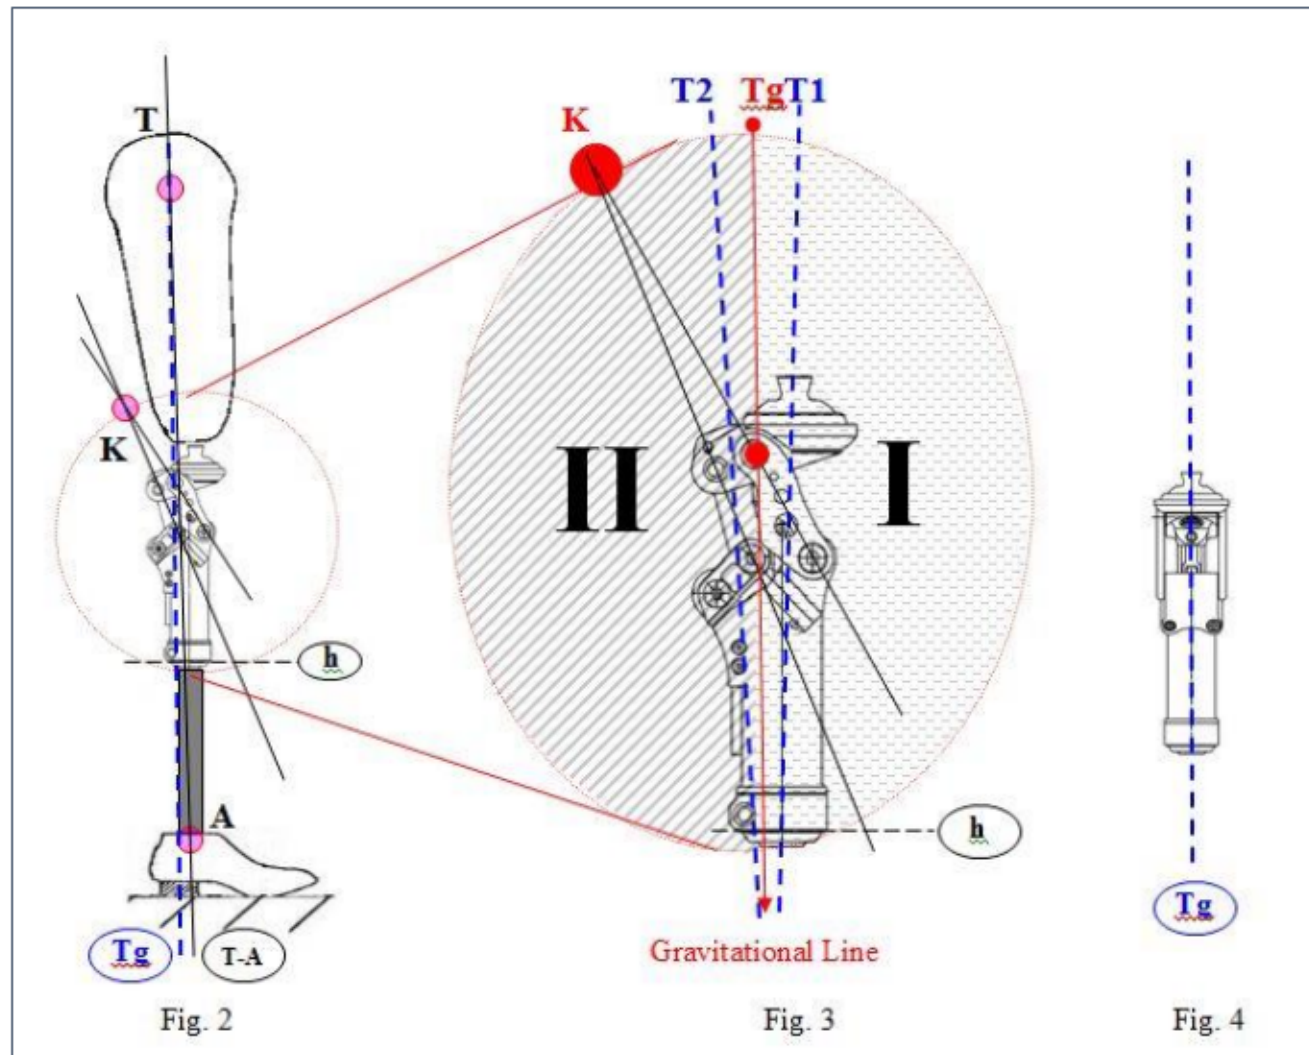

The polycentric knee with stance flexion system forces the geometry into a very stable position at heel contact until the patient rolls over the toe to release the knee into swing. The knee can be flexed in stance up to 20 degrees while providing stance stability. Elegantly simplistic design for stability. With correct alignment the knee is always in a stable position for patient confidence.

- Adjustable stance flexion from extreme stability with high stance flexion of up to 20 degrees to a very rapid response with low stance flexion
- Adjustable constant friction for swing phase resistance,
- Adjustable extension assist for swing phase.
- Usable for either above knee or knee disarticulation
- Best suited to be used for low K2 to mid K3.
- The frame construction is made of superlight aluminum alloy and the 5-bar linkage is made of aircraft alloy. The proximal attachments has A-P slide and Rotation adjustment.



PDAC approved HCPCS code(s)
• L5611, L5845, L5850

To download PDAC Letter please visit our website at www.stngco.com

Optional adapters: pyramid adapter (for AK) and lotus adapter (for KD).

P/N	Material	Product Weight	Weight Limit	Warranty
1324 AP Pyramid Adapter	Aluminum	766g	125kg/275lb	2 year
1324 AL Lotus Adapter	Aluminum	794g	125kg/275lb	2 year



1324 is part of the Green Family knee series



PROTOSTHETICS
3D PRINTED PROSTHETICS & ORTHOTICS

Protosthetics
617 4th St N Ste. 1
Fargo, ND 58102
(701) 478-2001
contact@protosthetics.com